



6WINDGate™

-

Exceptions and Linux - Fast Path Synchronization

-

v1.0

TABLE OF CONTENTS

1	INTRODUCTION	1
1.1	PURPOSE OF THE DOCUMENT	1
1.2	ACRONYMS	1
2	6WINDGATE ARCHITECTURE OVERVIEW	3
2.1	BENEFITS OF 6WINDGATE'S LINUX – FAST PATH SYNCHRONIZATION	3
2.2	6WINDGATE EXCEPTION STRATEGY AND CONTINUOUS SYNCHRONIZATION	4
2.3	6WINDGATE MAIN COMPONENTS	5
3	EXCEPTIONS	7
3.1	EXCEPTION CONCEPT	7
3.2	EXCEPTION TYPE	7
3.3	DATA PLANE VIRTUAL INTERFACE	8
3.4	FPTUN ENCAPSULATION	8
4	LINUX - FAST PATH SYNCHRONISATION	9
4.1	OVERVIEW	9
4.2	CACHE MANAGER	10
4.3	FAST PATH MANAGER	10
4.4	FPC API	10
4.5	6WINDGATE FAST PATH CONFIGURATION	10
4.5.1	Shared Memory	10
4.5.2	NETFPC	11
4.6	VRF SYNCHRONIZATION	11
5	FAST PATH STATISTICS AND HITFLAGS	12
5.1	FAST PATH STATISTICS	12
5.2	HITFLAGS	12

TABLE OF FIGURES

Figure 1: 6WINDGate - Exception and Continuous Synchronization	4
Figure 2: 6WINDGate Main Components	5
Figure 3: Linux Synchronization Architecture	9

1 INTRODUCTION

1.1 PURPOSE OF THE DOCUMENT

This document provides an overview about the exception and the Linux – Fast Path synchronization mechanisms implemented in 6WINDGate.

1.2 ACRONYMS

API	Application Programming Interface
ARP	Address Resolution Protocol
CM	Cache Manager
CP	Control Plane
DPDK	Data Plane Development Kit
DPVI	Data Plane Virtual Interface
FP	Fast Path
FPC	Fast Path Control
FPM	Fast Path Manager
FPN	Fast Path Networking
FPS	Fast Path Statistics
FPTUN	Fast Path TUNelling
ICMP	Internet Control Message Protocol
IKE	Internet Key Exchange
IP	Internet Protocol
IPsec	IP Security
L2	Layer 2
L3	Layer 3
MAC	Media Access Control
MIB	Monitoring Information Base
MTU	Maximum Transmission Unit
NAT	Network Address Translation
NIC	Network Interface Card
NDP	Neighbor Discovery Protocol
NETFPC	Network-based FPC
PPP	Point to Point Protocol

SDK	Software Development Kit
SA	Security Association
SP	Security Policy
TTL	Time To Live
VPP	Vector Packet Processing
VRF	Virtual Routing and Forwarding

2 6WINDGATE ARCHITECTURE OVERVIEW

2.1 BENEFITS OF 6WINDGATE'S LINUX – FAST PATH SYNCHRONIZATION

The 6WINDGate architecture is based on a Fast Path implementation that accelerates the Linux Networking Stack. The Fast Path requires dedicated high-performance packet processing software designed to take advantage of modern multicore processor platforms. This Fast Path is isolated from Linux, running on dedicated cores, to ensure deterministic performance.

Having a high-performance isolated Fast Path is mandatory but not enough. It has to be integrated with Linux Control Plane and Management Planes.

There are two options to achieve this integration:

- Redesign how Control and Management Planes interact with the Fast Path. This requires a significant amount of work to adapt and validate a very large number of complex protocols. Standard Linux networking tools have also to be adapted to work with the Fast Path. This approach has been selected by the VPP open source project.
- Reuse existing Linux Control and Management Planes. This approach requires the design of a Linux-friendly Data Plane to let the Fast Path act as a transparent solution to Linux.

This second option has been successfully implemented in 6WINDGate using Linux – Fast Path synchronization to provide:

- Support for all major Linux distributions.
- Reuse of all existing Linux management tools (iproute, iptables, ipset, brctl, ovs-*ctl, tcpdump...) with no changes.
- Support with no changes of well-known open source Control Plane applications such as FRRouting and StrongSwan.
- Support with no changes of management tools, either open source such as Ganglia, Grafana, Nagios, OpenDayLight and OpenStack or commercial distributions.

As a summary, Linux running 6WINDGate is Linux.

2.2 6WINDGATE EXCEPTION STRATEGY AND CONTINUOUS SYNCHRONIZATION

To achieve the Fast Path transparency to Linux, 6WINDGate implements what we call "Linux – Fast Past synchronization". It relies on two mechanisms: **exception strategy** and **continuous synchronization**, as described in Figure 1.

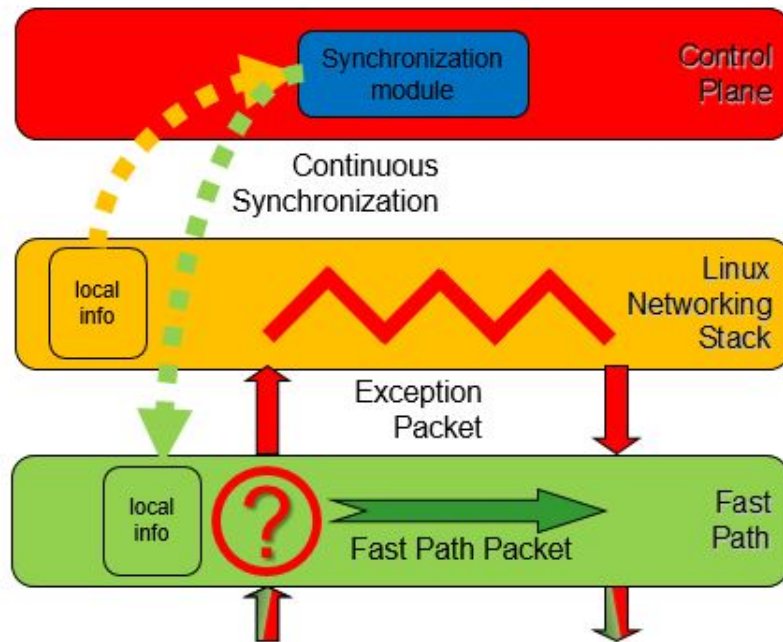


Figure 1: 6WINDGate - Exception and Continuous Synchronization

When local information is missing in the Fast Path to process a packet, when a packet type is not supported by the Fast Path, or when a packet is destined to the local Control Plane, then it is diverted to the Linux Networking Stack. These packets are known as exception packets and this mechanism is called the **exception strategy**.

The Linux Networking Stack is responsible for processing packets that could not be processed at the Fast Path level. These packets will be either processed by the 6WINDGate Linux Networking Stack, or by the Control Plane. It is to be noted that, in most cases, this accounts only for a few percentages of the traffic.

In the case of exception packets due to lack of information, the information learnt in the Linux Networking Stack during the processing of the packet will be transparently synchronized into the Fast Path. This way, subsequent packets of the same flow will then be handled by the Fast Path. This is the mechanism of **continuous synchronization**.

A good example is the case of a packet being diverted to the Linux Networking Stack because L2 forwarding information is missing in the Fast Path. The 6WINDGate Linux Networking Stack will receive the packet, perform L2 resolution and forward the packet. Thanks to the 6WINDGate architecture, the new L2 entry will automatically be configured in the Fast Path, so that a next packet of the same flow is processed in the Fast Path.

2.3 6WINDGATE MAIN COMPONENTS

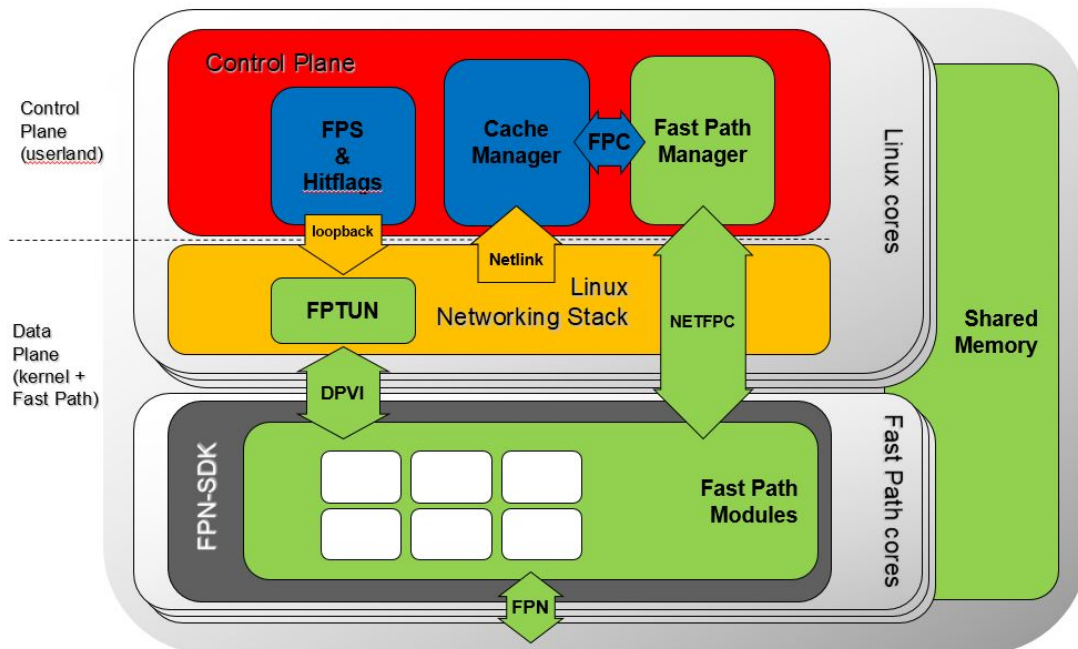


Figure 2: 6WINDGate Main Components

Figure 2 details the main components of the 6WINDGate architecture, as previously introduced. These components will be detailed in the subsequent paragraphs:

- 6WINDGate Fast Path Networking - SDK (FPN-SDK) provides an abstraction layer to the 6WINDGate Fast Path modules through the FPN API. The FPN-SDK is implementation-dependent; a specific FPN-SDK is required for a given implementation of the Fast Path for a processor environment (DPDK, processor SDK).
- 6WINDGate Fast Path modules process packets efficiently according to local information stored in the Shared Memory.
- NETFPC API triggers events in the Fast Path from the 6WINDGate Control Plane.
- 6WINDGate Cache Manager and Fast Path Manager are Linux userland modules allowing continuous synchronization between the Linux Networking Stack and the Fast Path. Both modules communicate through the Fast Path Control (FPC) API.
- The Linux Netlink API, running without any modification, notifies the Cache Manager of kernel events and state changes for interfaces, Layer 2 - Layer 3 tables, IPsec... It is also used to interface the 6WINDGate Linux Networking Stack to the Control Plane.
- 6WINDGate Data Plane Virtual Interface (DPVI) allows the communication between Fast Path and Linux Networking Stack for the implementation of the exception strategy. Some exceptions (refer section 3) are encapsulated in the Fast Path TUNelling (FPTUN) protocol that delivers exceptions to the right destination.

- Fast Path Statistics (FPS) module gathers counters from Fast Path protocols and builds global statistics for the system (Fast Path plus Linux Networking Stack).
- The Hitflag daemon updates hitflags into the Linux Networking Stack when packets go through the Fast Path. Hitflags inform the Linux Networking Stack about updates of ARP entries, conntracks, Linux Bridge...

3 EXCEPTIONS

3.1 EXCEPTION CONCEPT

In 6WINDGate architecture, all packets are received by the Fast Path, but some of them are delegated to Linux using the exception concept:

- Local destination,
- Missing processing information in the Shared Memory (ARP, IPsec SA...),
- Unaccelerated protocol.

The exception concept applies to all protocols that have to be split into two parts:

- Fast Path only implements packet processing to be done on each packet. This is performed by a simplified IP stack that finds the necessary information in a local memory that has been previously updated by high level protocols (signaling).
- When a received packet is too complex to be processed at the Fast Path level, it is forwarded to the Linux Networking Stack through an exception using a dedicated API called DPVI. For instance, it can be:
 - A packet intended at the Control Plane (ICMP echo request, routing packets, IKE packets...),
 - A packet for which information is missing to process it (No L3 route available, No L2 address available for destination/gateway, no IPsec info (SP/SA), missing conntrack info...),
 - A packet for a protocol delegated to Linux such as ARP/NDP or ICMP (TTL expiration).

Packets to be sent locally by the Linux Networking Stack or the Control Plane are directly injected in the outgoing flow.

It can be noted that exception packets are only a few percentages of the traffic making useless to have a full and complex IP stack at the Fast Path level.

3.2 EXCEPTION TYPE

Two kinds of exceptions are defined according to the process to be applied on the packet:

- The first type of exception is called "Basic Exception". For this type of exception, the Fast Path can provide the original incoming packet to the Linux Networking Path, where it is processed as incoming on a standard network interface.

For example, a Basic Exception is raised when the route lookup fails during forwarding.

- The second type of exception is called "Extended Exception". This type of exception is raised when the original packet cannot be restored and sent by the Fast Path to the Linux Networking Stack. The exception packet needs to be injected in a specific location in the Linux Networking Stack packet processing path.

For example, when an IPsec packet is received and decrypted by the Fast Path and forwarding information is missing for the inner packet, the Fast Path needs to raise an exception, but is not able to restore the original packet. Moreover, the decrypted packet shall not be sent in the standard input path of the Linux Networking Stack, as it would be discarded by the Security Policies. In this case, a Basic Exception cannot be used, and we use an Extended Exception to inject the inner

packet after the IPsec input processing checks in the Linux Networking Stack processing. The FPTUN protocol is used for encapsulating extended exceptions (refer section 3.4).

3.3 DATA PLANE VIRTUAL INTERFACE

The Data Plane Virtual Interface (DPVI) allows exchanging packets between the Fast Path and the Linux Networking Stack. The DPVI makes Fast Path ports appear as netdevices into the Linux Networking Stack.

The DPVI is implemented using the FPN-SDK. It provides NIC representor in Linux for standard control such as ethtool and other Linux tools.

The DPVI implements the exception strategy as follows:

- For Basic Exceptions, the DPVI implements a standard processing through netif_rx,
- For Extended Exceptions, packets are injected at the right place into the Linux Networking Stack thanks to the FPTUN header.

The DPVI is also used by Linux to send packets through the Fast Path.

3.4 FPTUN ENCAPSULATION

A specific protocol called FPTUN (Fast Path TUNneling) has been defined to manage Extended Exceptions between the different entities.

FPTUN is based on an encapsulation mechanism adding a FPTUN header to the IP or Ethernet packet to be sent to the Linux Networking Stack.

The FPTUN protocol has a reserved Ethernet type ETH_P_FPTUN. The protocol number (ethertype) for the FPTUN protocol is 0x2007. The FPTUN message is itself encapsulated into an Ethernet frame, and an exception is raised. The FPTUN message will be received via one of the network interfaces exported by the SDK, and handled by the FPTUN protocol handler in the Linux Networking Stack.

4 LINUX - FAST PATH SYNCHRONISATION

4.1 OVERVIEW

Figure 3 details the Linux – Fast Path synchronization architecture.

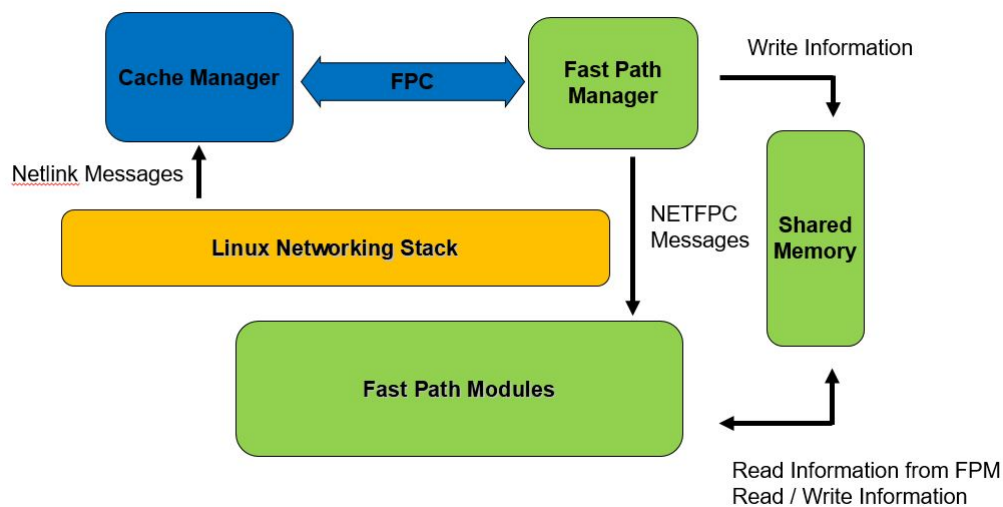


Figure 3: Linux Synchronization Architecture

The Cache Manager is a Control Plane userland software module that performs synchronization between Linux Networking Stack and Fast Path. It listens to the kernel updates (Netlink messages) done by the Control Plane (ARP and NDP entries, L3 routing tables, Security Associations...) and the Management Plane. The Cache Manager synchronizes the Fast Path with this information. Synchronization is made thanks to the FPC API. The Cache Manager sends messages including commands to the Fast Path Manager. Thanks to the Cache Manager, no change is required in the Control Plane and the Management Plane to be integrated with Fast Path modules.

The Fast Path Manager is a Control Plane userland software module and can be considered as a Fast Path Linux driver. The Fast Path Manager receives command messages from the Cache Manager through the FPC API and analyses these commands to update information for Fast Path modules. The Fast Path sends acknowledgment messages (error management) to the Cache Manager using the FPC API.

The update of information by the Fast Path Manager for Fast Path modules can use two different mechanisms:

- The Fast Path Manager writes relevant information for the different Fast Path modules, for instance routing entries, ARP entries, security policies, security associations... in a Shared Memory,
- The Fast Path Manager uses NETFPC. NETFPC is the transport protocol used to communicate between a Fast Path module and its co-localized Fast Path via a network pseudo-interface. This protocol can be used when a notification must be directly sent to a Fast Path module.

4.2 CACHE MANAGER

When the Cache Manager starts, it fetches its state from the Linux Networking Stack: interfaces, route entries... This processing is asynchronously updated when a new physical interface is detected through Netlink or an ioctl.

Then, the Cache Manager sends a reset command to the Fast Path Manager and waits for an acknowledgment of this command before sending any other command.

When the Cache Manager is running, it listens to:

- Netlink events, which are converted and reported to the Fast Path Manager,
- Fast Path Manager responses.

Netlink messages are originated by services (UNIX daemon or kernel modules), they are provisioned into the kernel, and then they are announced over the Netlink socket.

4.3 FAST PATH MANAGER

The Fast Path Manager application is a daemon acting as a server waiting for the Cache Manager to connect.

The initial task for the Fast Path Manager is to get read and write access to the Shared Memory. Then, the Fast Path Manager is waiting for a connection from the Cache Manager to enable FPC communication.

4.4 FPC API

The FPC API is the interface between the Cache Manager and the Fast Path Manager. It defines the exchange protocol and the structures of the configuration messages exchanged between them. The FPC API makes possible to have a distributed system, where the Cache Manager and Fast Path Manager run on different processors.

The FPC API is based on a specific protocol using a connection-oriented UNIX stream when the Cache Manager and Fast Path Manager are co-localized on the same processor or a TCP stream when the Fast Path Manager and the Cache Manager run on different ones. It implements a client (Cache Manager) / server (Fast Path Manager) architecture. Each message is encapsulated with a header that includes a message type, a sequence number, a report, and the length of the message.

4.5 6WINDGATE FAST PATH CONFIGURATION

4.5.1 Shared Memory

The 6WINDGate Fast Path modules read packet processing information from a dedicated memory zone, called the Shared Memory.

The Shared Memory allocation is SDK dependent, but its implementation is generic and the same data structures are provided, whatever the underlying hardware or execution environment. Data structures in the Shared Memory have been specifically designed for multicore processing. To achieve a high level of performance, access to the Shared Memory shall be lock free. This is ensured by a dedicated memory allocation that prevents different software modules to write in same locations and by optimized mechanisms to update data such as routing tables in memory.

The information in the Shared Memory is continuously updated by the Linux Networking Stack - Fast Path synchronization mechanism, and is read by the 6WINDGate Fast Path Modules when they need to process a packet.

Taking routing as an example, the 6WINDGate IPv4 and IPv6 Forwarding Fast Path Modules read entries of the routing table in the Shared Memory. When the routing table has to be updated in the Shared Memory (addition, deletion of a route...), this is done by the Fast Path Manager that has received a command on the NETFPC from the Cache Manager that previously listened to the Netlink messages between the Control Plane routing application and the Linux Networking Stack.

On the other hand, the Shared Memory is also updated by the 6WINDGate Fast Path Modules to maintain a set of Fast Path Statistics, used by the FPS to provide aggregated statistics when required from the Control Plane.

4.5.2 NETFPC

The Shared Memory is a non-interactive configuration mechanism. The Linux Networking Stack - Fast Path synchronization mechanisms write information there, which is used by the 6WINDGate Fast Path modules when they need it.

However, in some cases, an interactive communication mechanism is needed, that allows one side to trigger an event on the other side.

NETFPC is the transport protocol used to communicate between the Fast Path Manager and the co-localized Fast Path via a logical network interface. This is an alternative of writing into the Shared Memory when a change in the configuration requires the Fast Path to act immediately, which typically results in updating internal states outside the Shared Memory.

NETFPC is used for instance for:

- Setting the MTU on an interface as the Fast Path owns the drivers,
- Configuring MAC address or promiscuous mode.

NETPC uses a point to point communication between the FPM and its Fast Path modules. It's based on the IPv6 RAW protocol and uses link-local addresses. It works in a dedicated network namespace, isolated from networking configuration.

4.6 VRF SYNCHRONIZATION

Virtual Routing and Forwarding (VRF) is an IP technology that allows multiple instances of a routing table to work simultaneously within the same router. 6WINDGate provides support for VRF in all the Fast Path modules. In Linux, VRFs are configured using network namespaces.

The Linux / Fast Path Synchronization - VRF module implements synchronization of Linux netns to Fast Path VRFs. It based on:

- libvrf for the userland API. This library allows to manage and monitor 6WINDGate VRFs from any Linux userland process,
- netns-vrf.ko for the kernel API. This library allows to translate Linux network namespaces to VRF instances at the kernel level.

5 FAST PATH STATISTICS AND HITFLAGS

5.1 FAST PATH STATISTICS

The Fast Path Statistics module synchronizes the statistics of the Fast Path into the Linux Networking Stack. If this synchronization was not implemented, the system statistics would be inaccurate as the Linux Networking Stack is not aware of the traffic managed by the Fast Path.

These statistics are implemented through the following mechanisms:

- The Fast Path modules update the Shared Memory with statistics,
- The FPS daemon reads the Shared Memory statistics, and communicates them to the FPTUN kernel module through the loopback interface,
- The FPTUN kernel module adds Fast Path statistics to Linux Networking Stack statistics.

As a result:

- Linux applications are unchanged,
- Linux applications read statistics as usual from the Linux kernel, which include the kernel statistics plus Fast Path Statistics.

For instance, net-snmp is used as-is without any change with standard MIBs.

5.2 HITFLAGS

When packets go through the Fast Path, the kernel object states (ARP entries, conntracks, Linux bridge...) are not updated.

The role of the Fast Path Hitflags daemon is to update hitflags into the Linux Networking Stack when packets hit the Fast Path.

Hitflags are implemented through the following mechanisms:

- The Fast Path modules update the Shared Memory with hitflags,
- The Hitflags daemon reads the Shared Memory entries and communicates them to the FPTUN kernel module through the loopback interface,
- The FPTUN kernel module updates states into the Linux Networking Stack.

As a result:

- Linux applications are unchanged,
- Linux applications can read states from the Linux kernel as usual.